
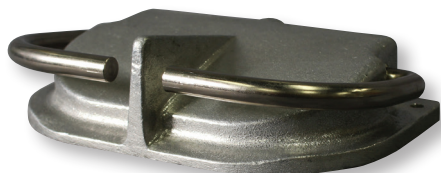


CONN TROL[®]

INTERNATIONAL, INC.

Series 220

Momentary Dual Action Sealed Foot Switch
Very low profile control with a
polished aluminum housing
15 AMP, ½ HP, 125/250 VAC

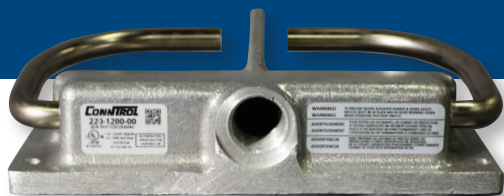

Momentary Dual Action

Custom Foot Switches:

The Series 220 can be provided with special nameplates, cord sets, plugs, strain reliefs, and other features that may be required for specific applications.

FEATURES

1. Polished aluminum housing with plated steel pedals.
2. ½" NPTF connector hole standard for cable strain relief fittings. Other connector holes available on request.
3. No exterior springs! Two torsion springs located inside foot switch.
4. Two mounting holes.
5. Capable of handling up to 12/3 cable or .50" O.D.
6. .187" x .020" quick connect terminals.
7. Wide target area for foot operation.
8. Long life snap switch.
9. #8 grounding screw is provided.
10. Skid-resistant elastomeric base pad.
11. UL listed to U.S. and Canadian safety standards.
12. NEMA and IEC Ingress Protection (IP) rated.
13. Single foot switch model available without barrier.
14. Integrated barrier.
15. Low profile design.
16. Buna-N O-Ring and Buna-N gasket seals.
17. Numerous cord strain reliefs available for your special requirements.



BENEFITS

The Series 220 foot switch was designed to offer environmentally sealed protection without the bulk of most sealed foot switches in the market today. Its unique treadle design provides a wide target area of operation and features an integrated barrier that discourages both treadles from operating at the same time.

YOUR FOOT, OUR SWITCH

135 Park Road • Putnam, CT 06260
860-928-0567 • ConnTrol.com

- Made in the USA
- No Minimum Order
- Superior Durability and Lifespan
- Exceptional Lead Times and Delivery

WARNING: It is the responsibility of the user to determine the suitability of a foot switch for the intended use and to determine that it will comply with all Federal, State, and Local safety and health regulations.