


Scale 1:3



1. Polished aluminum housing with plated steel pedals.
2. 1/2" NPTF connector hole standard for cable strain relief fittings. Other connector holes available on request.
3. No exterior sprouts! Two torsion springs located inside foot switch.
4. Two mounting holes.
5. Capable of handling up to 12/3 cable or .50" O.D.
6. .187" x .020" quick connect terminals.
7. Wide target area for foot operation.
8. Long life snap switch.
9. #8 grounding screw is provided.
10. Skid-resistant elastomeric base pad.
11. UL listed to U.S. and Canadian safety standards. 12. NEMA and IEC Ingress Protection (IP) rated.
13. Two pedal model has an integral barrier.
14. Low profile design.
15. Buna-N O-Ring and Buna-N gasket seals.
16. Numerous cord strain reliefs available for your special requirements.

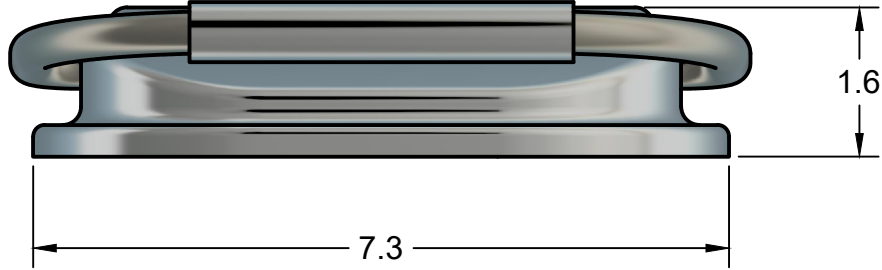

THIS DOCUMENT IS THE PROPERTY OF CONNTROL INTERNATIONAL, INC. AND IS NOT TO BE DISCLOSED, REPRODUCED, IN WHOLE OR IN PART, OR USED FOR MANUFACTURE FOR ANYONE OTHER THAN CONNTROL INTERNATIONAL, INC. WITHOUT ITS WRITTEN CONSENT.

UNLESS STATED, TOLERANCES ARE:
 .XX +/- .015
 .XXX +/- .005
 ALL DIMENSIONS ARE IN INCHES

DRAWING NUMBER
Series 210 Sales Drawing
 WS210-001

APPROVED	JPB	8/14/2024
CHECKED	RB	8/14/2024
DRAWN	JPB	8/14/2024

MATERIAL	N/A		REV
SCALE	1:2	SIZE	A
SHEET		1/1	