




SCALE 1:2



1. Solid steel construction, with a full cover and base pads.
2. The 892 features a cable clamp that is located inside the foot switch.
3. Redundant corrosion-resistant spring system.
4. High strength socket head hinge screws.
5. All threaded openings are extruded to provide extra thread engagement.
6. Two mounting holes.
7. Capable of handling up to 14/3 cord.
8. .187" x .020" quick-connect terminals required.
9. Long life snap switch.
10. #8 grounding screw is provided.
11. High quality, black epoxy coating.
12. A fiberglass sleeve is supplied to comply with UL requirement for strain-relief of thermoplastic jacketed cord.
13. Series 892 is UL listed to U.S. and Canadian safety standards.

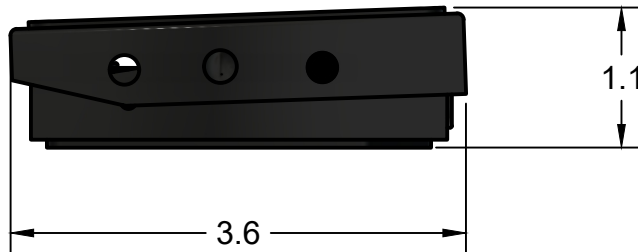

UNLESS STATED, TOLERANCES ARE:

.XX +/- .015
.XXX +/- .005

ALL DIMENSIONS ARE IN INCHES

DRAWING NUMBER

Series 892 Sales Drawing

WS892-001

THIS DOCUMENT IS THE PROPERTY OF CONNTROL INTERNATIONAL, INC. AND IS NOT TO BE DISCLOSED, REPRODUCED, IN WHOLE OR IN PART, OR USED FOR MANUFACTURE FOR ANYONE OTHER THAN CONNTROL INTERNATIONAL, INC. WITHOUT ITS WRITTEN CONSENT.

APPROVED	JPB	8/14/2024	MATERIAL	N/A	REV
CHECKED	RB	8/14/2024	SCALE	2:3	SIZE
DRAWN	JPB	8/14/2024	SIZE	A	SHEET
					1/1