




SCALE 1:2



1. Solid steel housing with cast zinc cover.
2. Skid-resistant elastomeric base pads.
3. Superior cable clamp system.
4. Redundant corrosion-resistant spring system.
5. High strength socket head hinge screws.
6. Threaded openings are extruded to provide extra thread engagement.
7. Four mounting holes located 2.88" on center side to side and 4.28" on center front to rear.
8. Capable of handling up to 12/3 cord.
9. Long life snap switch.
10. #8 grounding screw is provided.
11. High quality, black epoxy coating.

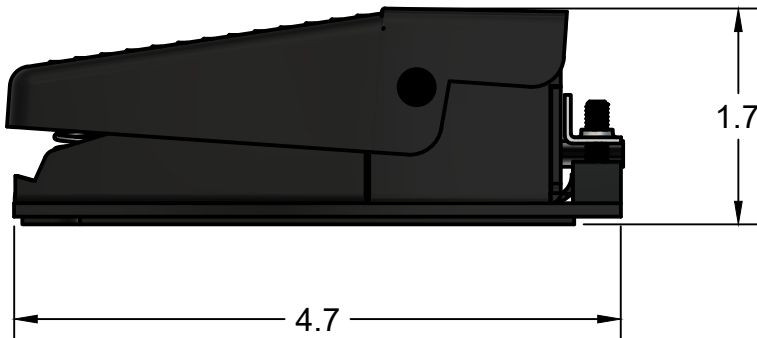

UNLESS STATED, TOLERANCES ARE:

.XX +/- .015
.XXX +/- .005

ALL DIMENSIONS ARE IN INCHES

DRAWING NUMBER

Series 893 Sales Drawing

WS893-001

THIS DOCUMENT IS THE PROPERTY OF CONNTROL INTERNATIONAL, INC. AND IS NOT TO BE DISCLOSED, REPRODUCED, IN WHOLE OR IN PART, OR USED FOR MANUFACTURE FOR ANYONE OTHER THAN CONNTROL INTERNATIONAL, INC. WITHOUT ITS WRITTEN CONSENT.

APPROVED JPB	8/15/2024	MATERIAL		N/A	REV
CHECKED RB	8/15/2024				
DRAWN JPB	8/15/2024	SCALE 2:3	SIZE A	SHEET 1/1	